

Data sheet electric holding magnet MAG-05000ALS--D / MAG-05000ALS-HD / MAG-05000STS--A / MAG-05000STS-HA / MAG-05000ALS-TD

MAG-05000ALS--D / MAG-05000ALS-HD (H - Hall sensor)

- housing:	Surface
- material:	Aluminium
- holding power:	Approx. 5.000N
- operating voltage:	12-24VDC
- current consumption:	500mA (12Vdc); 250mA (24Vdc)
- dimensions:	264(L) x 68(W) x 40(D) mm



**MAG-05000ALS--D
MAG-05000ALS-HD
MAG-05000ALS-TD**

MAG-05000ALS-TD (with Hall Sensor)

Same as MAG-05000ALS--D but with time delay (1 to 15 seconds)

As accessories available:

L-shaped bracket:	MAGAC-L500-----
Z-shaped bracket:	MAGAC-Z500-----

MAG-05000STS--A / MAG-05000STS-HA (H - Hall sensor)

- housing:	Surface
- material:	Steel
- holding power:	Approx. 5.000N
- operating voltage:	12VDC
- current consumption:	500mA
- dimensions::	220(L) x 68(W) x 41(D) mm




**MAG-05000STS--A
MAG-05000STS-HA**

As accessories available:

L-shaped bracket:	MAGAC-L600-----
Z-shaped bracket:	MAGAC-Z600N----

**MAGAC-Z500-----
MAGAC-Z600N----**

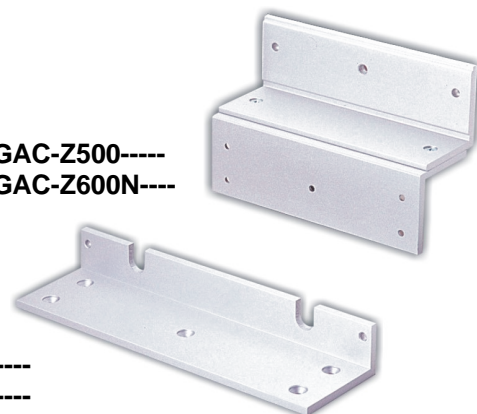

**MAGAC-L500-----
MAGAC-L600-----**

The illustrations can be different in detail to original